

521, 893

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number
WO 2004/009359 A1

- (51) International Patent Classification⁷: **B41F 15/44**
- (21) International Application Number:
PCT/NL2003/000537
- (22) International Filing Date: 23 July 2003 (23.07.2003)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data:
1021133 23 July 2002 (23.07.2002) NL
1022774 25 February 2003 (25.02.2003) NL
- (71) Applicant (for all designated States except US): **STORK PRINTS B.V.** [NL/NL]; 1-3, Raamstraat, NL-5831 AT Boxmeer (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **STEENKAMER,**

Arnoldus, Theodorus [NL/NL]; 39, Randenrade, NL-5807 BL Oostrum (NL). **STEENBEEK, Dirk** [NL/NL]; 2A, Reeënlaan, NL-6741 AX Lunteren (NL).


(74) Agent: **IEMENSCHOT, J., A.**; Exter Polak & Charlouis B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: **SQUEEGEE UNIT FOR A ROTARY SCREEN-PRINTING DEVICE**

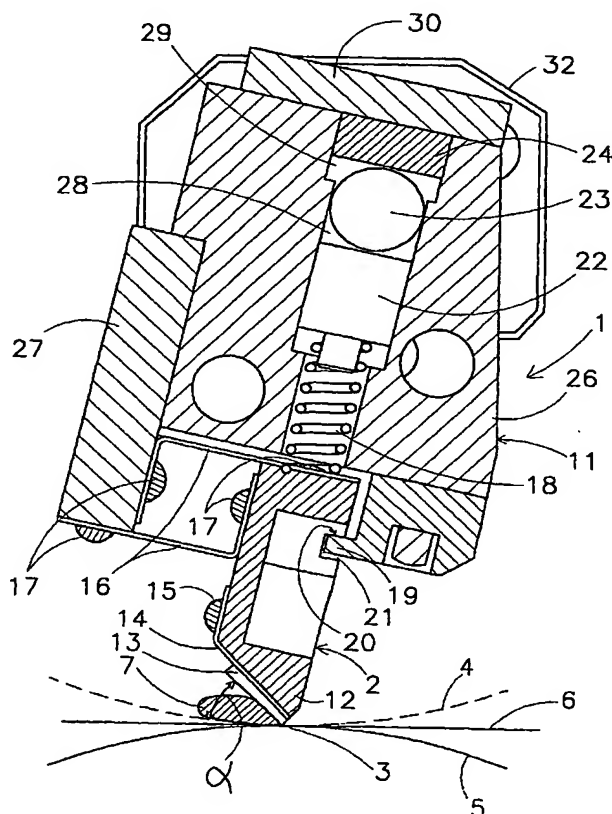

(57) Abstract: A squeegee unit for a rotary screen-printing device comprises a squeegee (2) with a squeegee edge (3) which is designed, during operation of a rotary screen-printing device in which the squeegee unit is mounted, to be pressed onto the inner side of a cylindrical screen of the rotary screen-printing device, and a squeegee holder (1) in which the squeegee is mounted. The squeegee edge (3) can be moved away from the squeegee holder (1) and towards the squeegee holder. A resilient element (18) is arranged between the squeegee edge (3) and the squeegee holder (1), in such a manner that the squeegee edge is pressed away from the squeegee holder by spring force. The squeegee unit is provided with travel-limiting means which are designed in such a manner that the squeegee edge (3) can be moved over a relatively short distance of at most 1 mm and preferably of at most 0.5 mm from the working position in a direction away from the squeegee holder.

WO 2004/009359 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*